

YWF

Instruction of Model

YWF系列型号说明

YWF 4 E -500 B A

① ② ③ ④ ⑤ ⑥

①异步外转子轴流风机 / Axial Fans with asynchronous external rotor motor

②电机极数 / Number of poles


③E: 单相电机 / Single—phase motor

D: 三相电机 / Three—phase motor

④叶轮直径(mm) / Impeller diameter in mm

⑤S: 吸风 / Sucking

B: 吹风 / Blowing

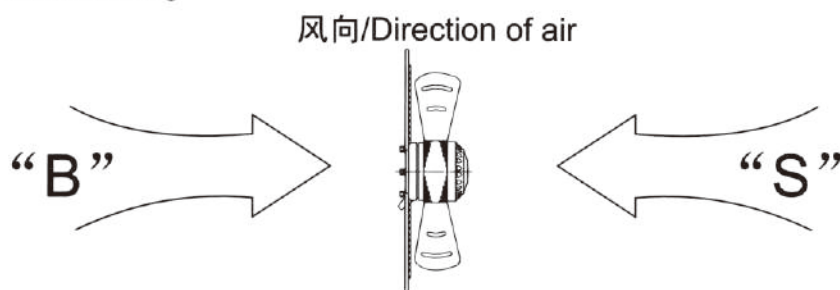

⑥A: 不带网罩 / Without guard grill


B: 平板网罩 / Flat guard grill

C: 平网网罩 / Flat guard grill with sidepiece

D: 凹网网罩 / Concave guard grill with sidepiece

E: 导风筒 / Inlet ring

F: 导风面板形式 / Inlet ring with mounting plate

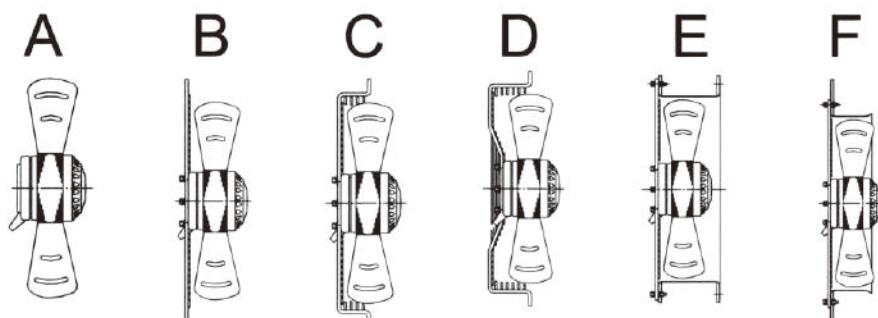

依照客户需求可以不用网罩,改用圆形导风桶或方形导风板,如右图所示:

According to the customer demands, we can use circular ventilation barrels or square ventilation plates instead of mesh enclosures, as shown in the following figure.



Ø 200



Axial Fan Motors

外转子轴流风机

sunflow®



Axial Fan Motors

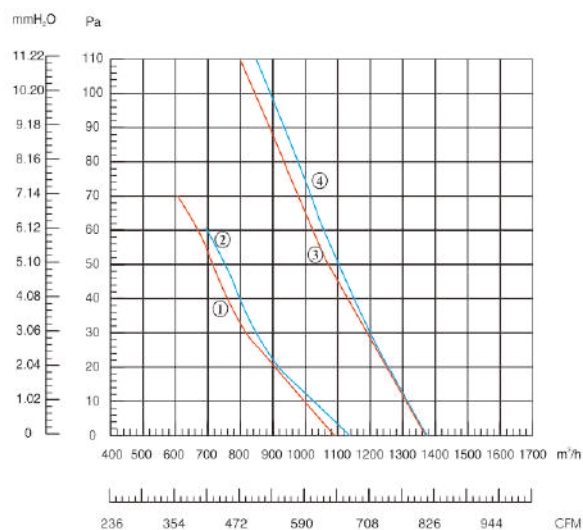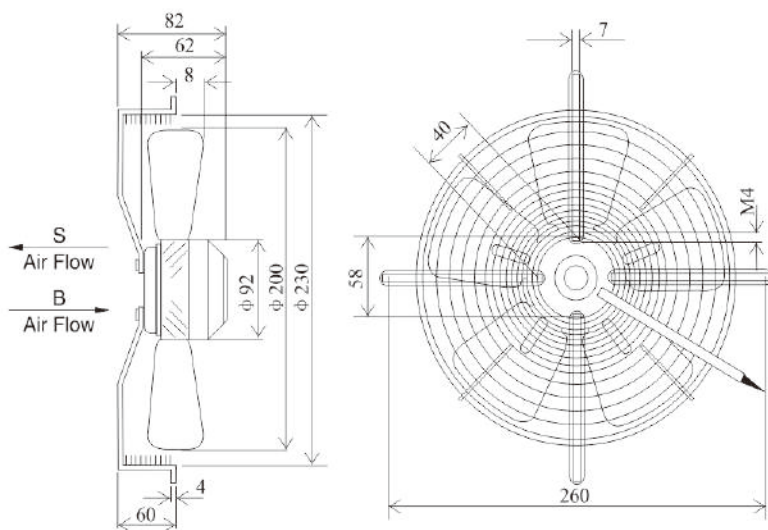

型号 Model	电压 Voltage V	频率 Frequency Hz	电流 Current Amp	输入功率 Input W	转速 Speed r/min	曲线编号 Curve no.	风量 Airflow M³/h	噪音 Noise dB(A)	电容 CAP μF	净重 NET Kg
YWF2D-200	380	50	0.15	47	2500	④	745	50	/	2.5
YWF2E-200	220	50	0.25	50	2500	③	745	50	2	2.5
YWF4D-200	380	50	0.10	25	1400	②	425	43	/	2.5
YWF4E-200	220	50	0.12	27	1400	①	425	43	1	2.5

注：如需定制特殊的电压、频率、风向请客户说明。

Note: We can customize the voltage, frequency and air flow according to your requirement.